



ABRASION

Abrasion Resistance
High

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

Room Temperature
80°F

Humidity
70%

Visible Wear And Some Pulling Of Fibers
500 Test Cycles

Further Wear And Some Pulling At Seam
550 Test Cycles

Material Wearing Through At Seam
2,750 Test Cycles

Material Destroyed
3,500 Test Cycles

Pre-Test Weight
7,191.6 mg

Post-Test Weight
6,680.7 mg

Test End Loss Of Mass Point Of Destruction
510.9 mg

CHEMICAL RESISTANCE


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	2
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	5
Strong Oxidants _____	5
Esters/Ketones _____	1
UV Light _____	2
Petroleum _____	3
Fungus ASTM G-21 _____	2
Halogen Free _____	Yes
RoHS _____	Yes

Melt Point
ASTM D-2117
410°F (210°C)

Maximum Continuous
Mil-I-23053
248°F (120°C)

Minimum Continuous
-49°F (-45°C)

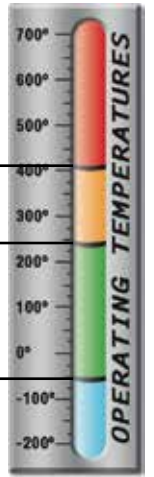

PHYSICAL PROPERTIES

Monofilament Diameter _____	NA
ASTM D-204	
Recommended Cutting _____	Scissor
Colors _____	1
Wall Thickness _____	.045
Specific Gravity ASTM D-792 _____	1.14
Moisture Absorption _____	2.7
% ASTM D-570	
Hard Vacuum Data _____	
ASTM E-595 at 10-5 torr	
TML _____	1.10
CVCM _____	.01
WVR _____	.69
Outgassing _____	High
Oxygen Index _____	22
ASTM D-2863	



800.323.5140 • 973.300.9242 • fax: 973.300.9409
104 Demarest Road • Sparta, NJ 07871

Nylon® is a registered trademark of DuPont Corporation.

