

ABRASION FLAMMABILITY

Abrasion Resistance
Medium

Rating _____ UL VW-1

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

CHEMICAL RESISTANCE

1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	1
Salt Water 0-5-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	2
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	2
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	None


Melt Point
ASTM D-2117

2,048°F (1,120°C)

Maximum Continuous
Mil-I-23053

1,202°F (650°C)

Minimum Continuous
-94°F (-70°C)

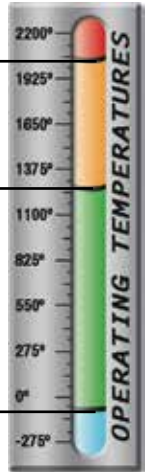

PHYSICAL PROPERTIES

Monofilament Diameter _____	NA
ASTM D-204	
Flammability Rating _____	VW-1
FMVSS-302 Approved	
Recommended Cutting _____	Scissor
Colors _____	6
Wall Thickness _____	.006-.016
Specific Gravity ASTM D-792 _____	1.0-1.8
Moisture Absorption _____	.01
% ASTM D-570	
Hard Vacuum Data _____	
ASTM E-595	
TML _____	.02
CVCM _____	.01
WVR _____	.00
Outgassing _____	Low