

## ABRASION FLAMMABILITY

**Abrasion Resistance**  
Medium

Rating \_\_\_\_\_ UL94V0

**Abrasion Test Machine**  
Taber 5150

**Abrasion Test Wheel**  
Calibrase H-18

**Abrasion Test Load**  
500g

**Room Temperature**  
80°F

**Humidity**  
74%

**Some Scuffing Visible**  
500 Test Cycles

**Significant Wear Is Visible**  
**With Several Braid**  
**Filaments Broken**  
1,200 Test Cycles

**Material Destroyed**  
1,950 Test Cycles

**Pre-Test Weight**  
5,365.1 mg

**Post-Test Weight**  
4,850 mg

**Test End Loss Of Mass**  
**Point Of Destruction**  
515.1 mg

## CHEMICAL RESISTANCE


1=No Effect      4=More Affected  
2=Little Effect    5=Severely Affected  
3=Affected

Aromatic Solvents _____	2
Aliphatic Solvents _____	1
Chlorinated Solvents _____	3
Weak Bases _____	1
Salts _____	1
Strong Bases _____	2
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	3
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	None

**Melt Point**  
ASTM D-2117  
482°F (250°C)

**Maximum Continuous**  
Mil-I-23053  
257°F (125°C)

**Minimum Continuous**  
-94°F (-70°C)

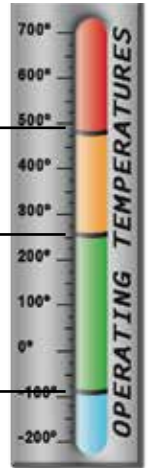

## PHYSICAL PROPERTIES

Monofilament Diameter _____	.008-.015
ASTM D-204	
Flammability Rating _____	UL94
Recommended Cutting _____	Hot Knife
Colors _____	4
Wall Thickness _____	.024-.038
Tensile Strength (Yarn) _____	6-10
ASTM D-2256 Lbs	
Specific Gravity ASTM D-792 _____	1.38
Moisture Absorption _____	.1-.2
% ASTM D-570	
Hard Vacuum Data ASTM E-595	
TML _____	19
CVCM _____	.00
WVR _____	.16
Smoke D-Max _____	56
ASTM E-662	
Outgassing _____	Med
Oxygen Index _____	21
ASTM D-2863	



Braided Sleeving Products

www.techflex.com

800.323.5140 • 973.300.9242 • fax: 973.300.9409  
104 Demarest Road • Sparta, NJ 07871

