

ABRASION FLAMMABILITY

Abrasion Resistance Rating _____ VW-1
High

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

Room Temperature
73°F

Humidity
55%

Visible Minor Scuffing
200 Test Cycles

Scuffing And Wear
Continues
300 Test Cycles

Scuffing And Wear
Continues
500 Test Cycles

Several Broken Strands
1,300 Test Cycles

Material Destroyed
1,650 Test Cycles

Pre-Test Weight
19,411.6 mg

Post-Test Weight
17,154.5 mg

Test End Loss Of Mass
Point Of Destruction
2,257.1 mg

CHEMICAL RESISTANCE


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____ 1
Aliphatic Solvents _____ 1
Chlorinated Solvents _____ 1
Weak Bases _____ 1
Salts _____ 1
Strong Bases _____ 1
Salt Water 0-5-1926 _____ 1
Hydraulic Fluid MIL-H-5606 _____ 1
Lube Oil MIL-L-7808 _____ 1
De-Icing Fluid MIL-A-8243 _____ 1
Strong Acids _____ 2
Strong Oxidants _____ 2
Esters/Ketones _____ 1
UV Light _____ 2
Petroleum _____ 1
Fungus ASTM G-21 _____ 1
Halogen Free _____ Yes
RoHS _____ Yes
SVHC _____ None

Melt Point
ASTM D-2117
2,048°F (1,120°C)

Maximum Continuous
Mil-I-23053
1,202°F (650°C)

Minimum Continuous
-94°F (-70°C)

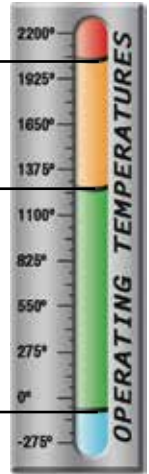

PHYSICAL PROPERTIES

Monofilament Diameter _____ NA
ASTM D-204
Flammability Rating _____ VW-1
Recommended Cutting _____ Scissor
Colors _____ 2
Wall Thickness _____ .031-.061
Specific Gravity ASTM D-792 _____ 1.0-1.8
Moisture Absorption _____ .01
% ASTM D-570
Hard Vacuum Data _____
ASTM E-595
TML _____ .02
CVCM _____ .01
WVR _____ .00
Outgassing _____ Low