


Mantelblech: 1,5 mm
 Klöpperböden: 1,5 mm

Technical drawing of a vertical storage tank with the following dimensions and annotations:

- Top Flange:** Thickness $\frac{3}{4}$ "
- Head:** Radius $R 1077$
- Shell Thickness:** Indicated as $1\frac{1}{2}$ " on both sides.
- Internal Components:** A central vertical pipe with a flange and a bottom outlet.
- Dimensions (from top to bottom):**
 - Total height: 925
 - Height to first internal flange: 710
 - Height between first and second internal flanges: 550
 - Height between second and third internal flanges: 390
 - Height of the bottom section: 230
- Bottom Section:**
 - Internal diameter: $\varnothing 363$
 - External diameter: $\varnothing 550$
 - Bottom flange: M10
- Annotation:** "Alle Anschlüsse mit Innengewinde Rp" (All connections with internal thread Rp).

PU-Hartschaum
fest aufgeschäumt

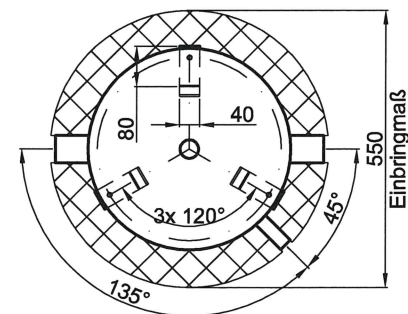

Behälter:	
Nennvolumen:	100 l
zulässiger Druck (PS):	3,0 bar
Prüfdruck (PN):	4,5 bar
zulässige Temperatur (TS):	0 - 95 °C
zulässiges Medium:	Wasser/Glykol
Gewicht:	25 kg
Werkstoff:	S235JR+AR
Korrosionsschutz:	innen roh, außen beschichtet

TWL-Technologie GmbH
Im Gewerbegebiet 2 - 12
D-92271 Freihung
www.twl-technologie.de

Bearbeiter:

Datum:	01.07.2025
--------	------------

Maßstab:
M 1:15

Pufferspeicher für Heiz- und Kühlbetrieb Typ HK 100

Art-Nr. HK.0100